



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 6 : A61F 2/44</p>	<p>A2</p>	<p>(11) International Publication Number: WO 99/38461 (43) International Publication Date: 5 August 1999 (05.08.99)</p>
<p>(21) International Application Number: PCT/EP99/00433 (22) International Filing Date: 22 January 1999 (22.01.99) (30) Priority Data: 60/073,271 30 January 1998 (30.01.98) US 60/095,425 5 August 1998 (05.08.98) US (71) Applicant (for all designated States except CA): SYNTHES AG CHUR [CH/CH]; Grabenstrasse 15, CH-7002 Chur (CH). (71) Applicant (for CA only): SYNTHES (U.S.A.) [US/US]; 1690 Russell Road, P.O. Box 1766, Paoli, PA 19301-1222 (US). (72) Inventors: PAUL, David, C.; 1513 Valley Road, Drexel Hill, PA 19026 (US). EMCH, Hansjuerg, W.; 1527 Spruce Street, Philadelphia, PA 19102 (US). SCHENK, Beat; 59 Cobblestone Drive, Paoli, PA 19301 (US). CARVER, Jeffrey, L.; 1011 Welsh Ayres Way, Downingtown, PA 19335 (US). BAKER, Kelly, J.; 1878 Shadyside Road, Coatesville, PA 19320 (US). (74) Agent: LUSUARDI, Werther; Dr. Lusuardi AG, Kreuzbühlstrasse 8, CH-8008 Zürich (CH).</p>		<p>(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published Without international search report and to be republished upon receipt of that report.</p>
<p>(54) Title: ALLOGENIC INTERVERTEBRAL IMPLANT</p> <div style="display: flex; justify-content: space-around; align-items: center;">   </div> <p>(57) Abstract</p> <p>An allogenic intervertebral implant (10) for fusing vertebrae is disclosed. The implant (10) is an annular plug conforming in size and shape with end plates of vertebrae. The implant has either an exterior surface identical to that of the harvest bone or an exterior surface machined to have a uniform shape such as an oval or a rectangle. The top and bottom surfaces (14, 16) of the implant (10) have a plurality of teeth (12) to resist expulsion and provide initial stability. The top and bottom surfaces (14, 16) can be either flat planar surfaces or curved surfaces. Preferably, the anterior height of the implant is greater than the posterior height so that the implant is wedge-shaped profile to help restore disc height and the natural curvature of the spine. In one embodiment, the top and bottom surfaces each have a channel oriented in the anterior, lateral, or antero-lateral direction for receiving a surgical instrument. The implant can also have a hole for attachment of an inserter. Although the interior space formed by the annular plug can be the natural shape defined by the medullary canal, the medullary canal walls can be machined so that the implant has a uniform interior space.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

ALLOGENIC INTERVERTEBRAL IMPLANT

This invention concerns a device in accordance with the pre-characterising portion of Claim 1. More particularly, it refers to an allogenic intervertebral implant for use in the treatment of back pain.

A number of medical conditions such as compression of spinal cord nerve roots, degenerative disc disease, and trauma can cause severe back pain. Intervertebral fusion is a surgical method of alleviating back pain. In intervertebral fusion, two adjacent vertebral bodies are fused together by removing the affected intervertebral disc and inserting an implant that would allow for bone to grow between the two vertebral bodies to bridge the gap left by the disc removal.

A number of different implants and implant materials have been used for fusion with varying success. Current implants used include titanium cages and allografts. Titanium cages suffer from the disadvantage of requiring drilling and tapping of the vertebral endplates for insertion. In addition, the incidence of subsidence in long term use is not known. Due to MRI

incompatibility of titanium, determining fusion is problematic. Finally, restoration of lordosis, i.e., the natural curvature of the cervical and lumbar spine is very difficult when a titanium cage is used.

Allografts are sections of bone taken from the diaphysis of a long bone, such as the radius, ulna, fibula, humerus, tibia, or femur of a donor. A cross section of the bone is taken and processed using known techniques to preserve the allograft until implantation and reduce the risk of an adverse immunological response when implanted. For example, U.S. Patent No. 4,678,470 discloses a method for processing a bone grafting material which uses glutaraldehyde tanning to produce a non-antigenic, biocompatible material. Allografts have mechanical properties which are similar to the mechanical properties of vertebrae even after processing. This prevents stress shielding that occurs with metallic implants. They are also MRI compatible so that fusion can be more accurately ascertained and promote the formation of bone, i.e., osteoconductive. Although the osteoconductive nature of the allograft provides a biological interlocking between the allograft and the vertebrae for long term mechanical strength, initial and short term mechanical strength of the interface between the allograft and the vertebrae are lacking such that there is a possibility of the allograft being expelled after implantation.

U.S. Patent No. 5,728,159 discloses an allograft having grooves on end faces in an attempt to try to promote stability, but there are more effective ways for resisting expulsion.

For example, WO 98/17209, published April 30, 1998, is directed to a spinal spacer and has one embodiment which is an allograft cortical ring having teeth on superior and/or inferior surfaces. These teeth provide the initial, secure interlocking with the vertebrae.

Most allografts are simply sections of bone which, although cut to the approximate height of the disc being replaced, have not been sized and/or machined on the exterior surface to have a uniform shape. As a result, the fusion of the vertebral bodies does not occur in optimal anatomic position in a consistent manner along the surface of the endplates. While a surgeon may do some minimal intraoperative shaping and sizing to customize the allograft for the patient's anatomy, significant shaping and sizing of the allograft is not possible due to the nature of the allograft. Even if extensive shaping and sizing were possible, a surgeon's ability to manually shape and size the allograft to the desired dimensions is severely limited.

As the discussion above illustrates, there is a need for an improved allogenic implant for fusing vertebrae and relieving back pain. The invention as claimed aims at solving the above described problems.

The present invention provides an allogenic intervertebral implant for use when surgical fusion of vertebral bodies is indicated as defined in Claim 1.

The annular plug of allogenic bone is dimensioned in such a way that it conforms in size and shape with end plates of adjacent vertebrae, i.e. a rounded or approximately circular form.

In a preferred embodiment the three-dimensional structure of the intervertebral implant includes a plurality of teeth. Preferably the three-dimensional structure has a minimum height of 0,5 mm and a maximum height of 1,5 mm relative to the top and bottom surfaces of the implant.

The teeth preferably have a pyramid shape or a saw-tooth shape. In one embodiment, the implant has an exterior surface machined to have a uniform shape, such as an oval or a rectangle. The interior space delineated by the annular plug also can have a machined wall to provide the implant with a uniform interior space. The interior space delineated by the annular plug can be filled with spongiosa, bone graft substitutes or artificial bone material.

The top and bottom surfaces may be flat planar surfaces or curved surfaces to mimic the topography of the end plates of the adjacent vertebrae. In a preferred embodiment, the anterior

height of the implant is greater than the posterior height of the implant so that the implant has a wedge-shaped profile to help restore disc height and the natural curvature of the spine.

In one embodiment, the implant has channels on the top and bottom surfaces for receiving a surgical tool, e.g. a distractor. These channels can run in the anterior, lateral, or antero-lateral direction to accommodate a variety of different tools used in surgical procedures. Finally, a threaded hole on the anterior, antero-lateral, or lateral side can be provided for receiving a threaded arm of an insertion tool.

The allogenic bone is preferably in the form of a cross section transverse to the longitudinal axis a human long bone, typically with a height of 5 to 8 mm. Preferably the allogenic bone has been process frozen or freeze dried. The allogenic bone may also be treated with an antiseptic solution.

In the drawings:

FIG. 1 is a top view of a first embodiment of the implant according to the present invention;

FIG. 2 is a front view of the implant of FIG. 1;

FIG. 3 is a top view of a second embodiment of the implant;

FIG. 4 is a side view of the implant of FIG. 1;

FIG. 5 is a side view of a third embodiment of the implant;

FIG. 6 is a close up of region A from FIG. 4 and FIG. 8;

FIG. 7 is a top view of a fourth embodiment of the implant according to the present invention;

FIG. 8 is a side view of the implant of FIG. 7;

FIG. 9 is a top view of a sixth embodiment of the implant; and

FIG. 10 shows an alternative tooth configuration.

FIG. 1 shows a top view of a first embodiment of an allogenic intervertebral implant 10 according to the present invention. Implant 10 is annular and conforms in size and shape with the end plates of the vertebrae between which implant 10 is to be implanted. Because implant 10 is annular, new bone can form in interior 11. Interior 11 can be filled with bone chips or any other osteoconductive material to promote the formation of bone. Although implant 10 will probably be predominantly used in the lumbar region of the spine, implant 10 can be configured for implantation in any region of the spine. Implant 10 has a plurality of teeth 12 on superior and inferior surfaces 14, 16 which provide a mechanical interlock between implant 10 and the end plates. These teeth 12 provide the mechanical interlock by

penetrating the end plates. The initial mechanical stability afforded by teeth 12 minimizes the risk of post-operative expulsion of implant 10. Preferably, teeth 12 are pyramid-shaped in which the angle formed from the tip to the base may be between about 45 and 75° and is preferably about 60°. The details of teeth 12 are best seen in FIG. 6. The teeth provide an enhanced interlock with the adjacent vertebrae compared to the use of channels, because the teeth impale the vertebrae surfaces. In comparison, channels impart grooves into the vertebrae surfaces and the implant can slide out along the direction of the channels or grooves. In an alternative embodiment, teeth 12 have a saw-tooth shape (FIG. 10).

As shown in FIG. 1 and FIG. 2, superior surface 14 has a channel 18 and inferior surface 16 has a channel 20 which is parallel to channel 18. Channels 18, 20 are sized to receive a surgical instrument such as an inserter and/or distractor. As the names imply, an inserter is a surgical instrument used to insert implant 10 and a distractor is a surgical instrument used to separate the adjacent vertebrae so that the surgeon has access to the intervertebral space. If the inserter has a threaded arm, implant 10 can be provided with optional threaded hole 21. In FIG. 1 and FIG. 2, channels 18 and 20 are oriented in the anterior/posterior direction. This orientation is useful if the surgeon prefers an anterior surgical approach.

FIG. 3 shows a second embodiment of an allogenic intervertebral implant 110 according to the present invention. In general, most of the structure of implant 110 (as well as the embodiments described below) is like or comparable to the structure of implant 10 and, accordingly the same reference numeral is used for like components and discussion of those like components is not believed necessary. As shown in FIG. 3, channels 18, 20 can run in the antero-lateral direction to facilitate use of implant 110 with an antero-lateral surgical approach. As another alternative embodiment, channels 18, 20 could run in the lateral direction for a lateral approach. Similarly, a threaded hole 21 optionally can be located on the lateral or antero-lateral side of implant 10.

In order to restore the natural curvature of the spine after the affected disc has been removed, implant 10 is provided with a wedge-shaped profile. As shown in FIG. 4, one way to achieve this wedge shape results from a gradual decrease in height from the anterior side 22 to the posterior side 24. In anatomical terms, the natural curvature of the lumbar spine is referred to as lordosis. When implant 10 is to be used in the lumbar region, angle α should be approximately $4,2^\circ$ so that the wedge shape is a lordotic shape which mimics the anatomy of the lumbar spine. Furthermore, when used in the lumbar region, the ratio of the height of anterior side 22 (h_1) to the height of posterior side 24 (h_2) should be approximately 1,1-2 with the length of implant 10 (l) being approximately 22 - 30 mm.

In FIG. 4, superior and inferior surfaces 14, 16 are flat planar surfaces so that if the surgeon prepares the endplates to be parallel surfaces with a burr, implant 10 fits tightly between the bone surfaces.

FIG. 5 illustrates that superior and inferior surfaces 14, 16 of a third embodiment of an allogenic intervertebral implant 210 can be curved surfaces and still retain the wedge-shaped profile. The curved surface of superior and inferior surfaces 14, 16 is a mirror-image of the topography of the vertebral end plates. Thus, the curved surfaces conform to the contours of the end plates.

FIG. 7 shows a top view of a fourth embodiment of an allogenic intervertebral implant 310 according to the present invention. Although implant 310 will probably be predominantly used in the cervical region of the spine, implant 310 can be configured for implantation in any region of the spine. Interior 11 can be defined by the natural shape of the medullary canal as was the case for implant 10, 110, 210. Alternatively, the medullary canal can be machined so that the wall that formed interior 11 are uniform in shape and texture.

As previously noted, teeth 12 are preferably pyramid-shaped in which the angle formed from the tip to the base is preferably about 60°. Pyramid-shaped teeth help prevent expulsion of the implant in all directions. The prevention of movement between

implant 310 and the vertebrae is particularly important when the surgeon removes all of the annulus fibrosis, as may be the case for cervical vertebrae.

Most allografts are processed and used without significant machining of the exterior surface. In other words, the allografts have substantially the shape of the bone from which the allograft was harvested. As shown in FIG. 7, an exterior surface 26 of implant 310 has been machined to have a uniform shape. The uniform shape promotes initial stability until biological fixation is achieved with bony fusion.

As shown in FIG. 7, the exterior surface 26 has an oval shape. The oval shape preferably is arranged to have lateral sides 28 along the smaller oval axis and anterior and posterior sides 22, 24 along the longer axis. In another embodiment of the invention shown in FIG. 9, the exterior surface 26 of implant 410 is rectangular in shape with lateral sides 28 shorter in length than anterior and posterior sides 22, 24. The oval and rectangle shape and size of implants 310, 410 can be made to closely match the shape and size of the affected vertebrae. Typically, lateral sides 28 and anterior and posterior sides 22, 24 would be approximately 8-18 mm in length.

In order to restore the intervertebral space to the proper size after the affected disc has been removed, implant 310 has a height, h , sized to match the height of the removed disc, as shown in FIG. 8. The matched height helps promote fusion by

providing direct contact between the bone and implant 310. Typically, h would be approximately 4-20 mm for cervical vertebrae. Implant 310 has a uniform height so that the profile of implant 310 is rectangular. Alternatively, as shown in FIG. 4 and FIG. 5, implant 310 can have a wedge shaped profile with either flat planar surfaces or curved surfaces.

It should be noted that implants 310, 410 can be configured so that h would be approximately 10-100 mm. These larger sizes could be used in corpectomy, a surgical procedure in which a section of several vertebrae is removed. Implants 310, 410 would be inserted in the space created by the removed section of bone. Due to the nature of corpectomy, an accurate preoperative determination of the size of the implant needed is not possible. Thus, implant 310, 410 can be cut to the proper size by the surgeon. In such cases, the implants 310, 410 would only have teeth on either superior surface 14 or inferior surface 16.

CLAIMS

1. Intervertebral implant (10) comprising an annular plug of allogenic bone conforming in size and shape with end plates of vertebrae, wherein top and bottom surfaces (14,16) of the implant (10) include a three-dimensional structure (12) positioned thereon for interlocking with adjacent vertebrae.
2. Intervertebral implant (10) according to claim 1, wherein said three-dimensional structure (12) includes a plurality of teeth.
3. Intervertebral implant (10) according to claim 1 or 2, wherein said three-dimensional structure (12) has a minimum height of 0,5 mm relative to the top and bottom surfaces (14,16).
4. Intervertebral implant (10) according to one of the claims 1 to 3, wherein said three-dimensional structure (12) has a maximum height of 1,5 mm relative to the top and bottom surfaces (14,16).
5. Intervertebral implant (10) according to one of the claims 1 to 4, wherein said allogenic bone has been obtained from a human long bone, preferably from a femur, humerus, radius, ulna or fibula.
6. Intervertebral implant (10) according to claim 5, wherein said allogenic bone is a cross section transverse to the longitudinal axis of said long bone, preferably with a height of 5 to 8 mm.

7. Intervertebral implant (10) according to one of the claims 1 to 6, wherein said allogenic bone is treated with an antiseptic solution.
8. Intervertebral implant (10) according to one of the claims 1 to 7, wherein said allogenic bone has been process frozen or freeze dried.
9. Intervertebral implant (10) according to one of the claims 1 to 8, wherein the allogenic bone comprises glutaraldehyde.
10. Intervertebral implant (10) according to one of the claims 1 to 9, wherein the interior space delineated by the annular plug is filled with spongiosa, bone graft substitutes or artificial bone material.
11. Intervertebral implant (10) according to one of the claims 1 to 10, wherein the top and bottom (14,16) surfaces each have a channel (18,20) for receiving a surgical instrument.
12. Intervertebral implant (10) according to claim 11, wherein the channels (18,20) run in an anterior-posterior direction.
13. Intervertebral implant (10) according to claim 11, wherein the channels (18,20) run in an antero-lateral direction.
14. Intervertebral implant (10) according to claim 11, wherein the channels (18,20) run in a lateral direction.

15. Intervertebral implant (10) according to one of the claims 1 to 14, wherein the implant has a wedge-shaped profile to help restore disc height and spine curvature.

16. Intervertebral implant (10) according to claim 15, wherein said implant has an anterior height which is greater than a posterior height to produce the wedge-shaped profile.

17. Intervertebral implant (10) according to one of the claims 1 to 16, wherein the teeth (12) have a pyramidal shape.

18. Intervertebral implant (10) according to one of the claims 1 to 17, wherein at least one side of the implant (10) has at least one hole for attachment of an inserter.

19. Intervertebral implant (10) according to claim 18, wherein the at least one hole is threaded.

20. Intervertebral implant (10) according to claim 19, wherein the at least one hole is provided in an anterior, antero-lateral, or lateral side.

21. Intervertebral implant (10) according to one of the claims 1 to 20, wherein the top and bottom surfaces (14,16) are flat planar surfaces.

22. Intervertebral implant (10) according to one of the claims 1 to 20, wherein the top and bottom surfaces (14,16) are curved surfaces which are contoured to mimic the end plates of the adjacent vertebrae.

23. Intervertebral implant (10) according to one of the claims 1 to 22, wherein the exterior surface of said implant has a uniform shape.

24. Intervertebral implant (10) according to claim 23, wherein the exterior surface has an oval shape.

25. Intervertebral implant (10) according to claim 23, wherein the exterior surface has a rectangular shape.

26. Intervertebral implant (10) according to one of the claims 1 to 25, wherein the annular plug includes an interior surface of a machined wall.

27. Intervertebral implant (10) according to one of the claims 1 to 26, wherein, the teeth have a saw tooth shape.

1/2

FIG. 1

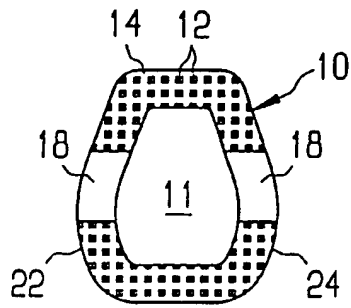


FIG. 2




FIG. 3

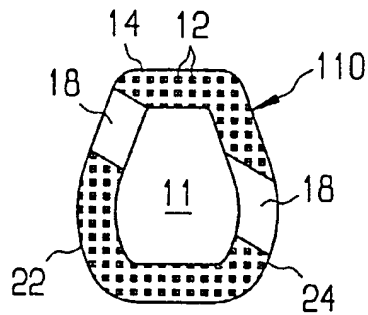


FIG. 4

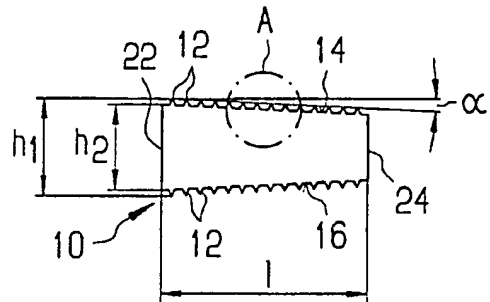


FIG. 5

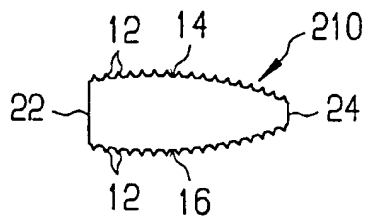


FIG. 6




FIG. 7

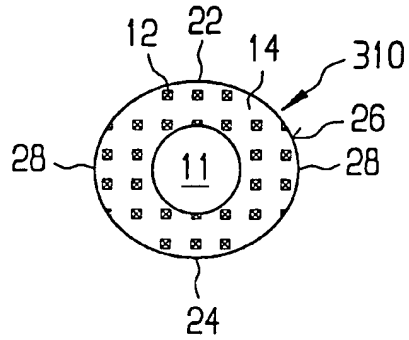


FIG. 8

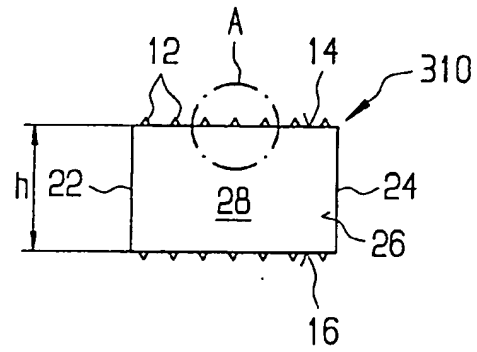


FIG. 9


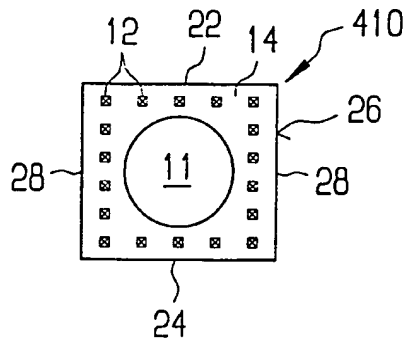




FIG. 10



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : A61F 2/44	A3	(11) International Publication Number: WO 99/38461 (43) International Publication Date: 5 August 1999 (05.08.99)
(21) International Application Number: PCT/EP99/00433 (22) International Filing Date: 22 January 1999 (22.01.99) (30) Priority Data: 60/073,271 30 January 1998 (30.01.98) US 60/095,425 5 August 1998 (05.08.98) US (71) Applicant (for all designated States except CA): SYNTHES AG CHUR [CH/CH]; Grabenstrasse 15, CH-7002 Chur (CH). (71) Applicant (for CA only): SYNTHES (U.S.A.) [US/US]; 1690 Russell Road, P.O. Box 1766, Paoli, PA 19301-1222 (US). (72) Inventors: PAUL, David, C.; 1513 Valley Road, Drexel Hill, PA 19026 (US). EMCH, Hansjuerg, W.; 1527 Spruce Street, Philadelphia, PA 19102 (US). SCHENK, Beat; 59 Cobblestone Drive, Paoli, PA 19301 (US). CARVER, Jeffrey, L.; 1011 Welsh Ayres Way, Downingtown, PA 19335 (US). BAKER, Kelly, J.; 1878 Shadyside Road, Coatesville, PA 19320 (US). (74) Agent: LUSUARDI, Werther; Dr. Lusuardi AG, Kreuzbühlstrasse 8, CH-8008 Zürich (CH).	(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims</i> <i>and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 04 November 1999 (04.11.1999)	
(54) Title: ALLOGENIC INTERVERTEBRAL IMPLANT		
<div style="display: flex; justify-content: space-around; align-items: center;">   </div>		
(57) Abstract <p>An allogenic intervertebral implant (10) for fusing vertebrae is disclosed. The implant (10) is an annular plug conforming in size and shape with end plates of vertebrae. The implant has either an exterior surface identical to that of the harvest bone or an exterior surface machined to have a uniform shape such as an oval or a rectangle. The top and bottom surfaces (14, 16) of the implant (10) have a plurality of teeth (12) to resist expulsion and provide initial stability. The top and bottom surfaces (14, 16) can be either flat planar surfaces or curved surfaces. Preferably, the anterior height of the implant is greater than the posterior height so that the implant is wedge-shaped profile to help restore disc height and the natural curvature of the spine. In one embodiment, the top and bottom surfaces each have a channel oriented in the anterior, lateral, or antero-lateral direction for receiving a surgical instrument. The implant can also have a hole for attachment of an inserter. Although the interior space formed by the annular plug can be the natural shape defined by the medullary canal, the medullary canal walls can be machined so that the implant has a uniform interior space.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/EP 99/00433

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 A61F2/44		
According to International Patent Classification (IPC) or to both national classification and IPO		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 A61F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	WO 98 17209 A (SDGI HOLDINGS, INC.) 30 April 1998 (1998-04-30) page 19, line 30 -page 22, line 15 page 24, line 15 -page 25, line 33 page 26, line 5 - line 24 page 37, line 11 - line 21; figures 26-42 abstract	1-8,10, 17-21, 24-26
X,P	US 5 728 159 A (STROEVER ET AL.) 17 March 1998 (1998-03-17) abstract; figures 1-7	1,3-7, 10,21, 23,26
E	WO 99 09914 A (UNIVERSITY OF FLORIDA, TISSUE BANK, INC.) 4 March 1999 (1999-03-04) the whole document	1-7,10, 15-27
-/-		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search 24 August 1999		Date of mailing of the international search report 17. 09. 1999
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Olivier Piolat

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 99/00433

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 25945 A (UNIVERSITY OF FLORIDA, TISSUE BANK, INC.) 24 July 1997 (1997-07-24) the whole document ---	1-27
A	US 4 950 296 A (MCINTYRE) 21 August 1990 (1990-08-21) abstract; figures 3,4 ---	1-27
A	WO 97 14378 A (DANEK MEDICAL, INC.) 24 April 1997 (1997-04-24) abstract; figures 4,8,11 ---	1-27
A	WO 97 32547 A (THALGOTT, J. S.) 12 September 1997 (1997-09-12) abstract; figures 1-8 -----	1-27

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No
PCT/EP 99/00433

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9817209 A	30-04-1998	AU 4994697 A US 5888222 A	15-05-1998 30-03-1999
US 5728159 A	17-03-1998	NONE	
WO 9909914 A	04-03-1999	AU 8922998 A	16-03-1999
WO 9725945 A	24-07-1997	US 5814084 A AU 704228 B AU 1700597 A CA 2243152 A EP 0876129 A PL 328226 A	29-09-1998 15-04-1999 11-08-1997 24-07-1997 11-11-1998 18-01-1999
US 4950296 A	21-08-1990	NONE	
WO 9714378 A	24-04-1997	AU 7394496 A AU 7394996 A EP 0855886 A EP 0855887 A WO 9714377 A US 5782830 A US 5888222 A	07-05-1997 07-05-1997 05-08-1998 05-08-1998 24-04-1997 21-07-1998 30-03-1999
WO 9732547 A	12-09-1997	US 5865845 A AU 2072797 A EP 0888097 A	02-02-1999 22-09-1997 07-01-1999